


SPECIFICATIONS

Size	Metric	British
Max. Working Height	22.21m	72ft 10in
Max. Platform Height	20.21m	66ft 4in
Max. Horizontal Reach	12.72m	41ft 9in
Overall Length(Stowed) A	9.55m	31ft 4in
Overall Width(Stowed) B	2.29m	7ft 6in
Overall Height(Stowed) C	2.49m	8ft 2in
Platform Size(Length×Width)	1.83m×0.79m	6ft × 2ft 7in
Turntable Tailswing	0.93m	3ft 1in
Ground Clearance D	0.279m	11in
Wheelbase E	2.4m	7ft 10in
Turning Radius(Inside/Outside)	1.56m/2.57m	5ft 1in/8ft 5in
Tyres	315/55 D20	315/55 D20
Up and Over Clearance	8.13m	26ft 8in
Max. Down Probing Depth	1.77m	5ft 10in



Performance		
S.W.L	230kg	507lb
Max. Occupants	2	2
Gradeability	30%	30%
Travel Speed(Stowed)	6.1km/h	6.1km/h
Travel Speed(Raised)	1.1km/h	1.1km/h
Max.Working Slope	X-5°/Y-5°	X-5°/Y-5°
Turret Rotation	360 °Continuous	360 °Continuous
Platform Rotation	180°	180°
Jib Movement	130°	130°

Weight		
Overall Weight	10100kg	22266lb

Power		
Battery	24×2V/375Ah	24×2V/375Ah
Charger	48V/60A	48V/60A
Hydraulic Oil Tank	67L	67L

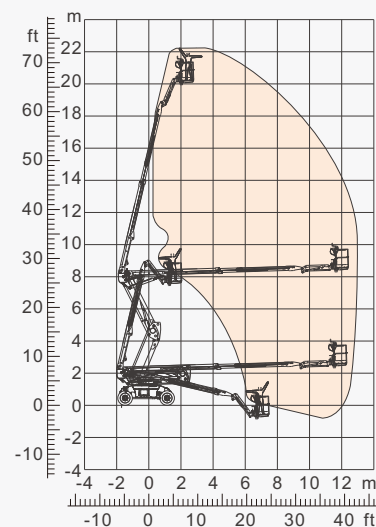

Range Of Motion

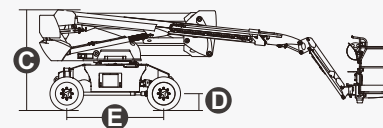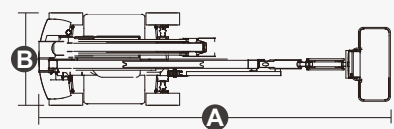

FEATURES

Standard Items

- 2.31m (7ft 7in) Jib Boom
- Front Oscillating Axle
- Four-Wheel Steering
- Four-Wheel Drive
- Self-Leveling Platform
- 180° Left And Right Swing Platform
- Proportional Joystick Controls
- Thumb Rocker Steer
- Drive Enable
- Ac Power Cord To Platform
- Tilt Alarm
- Descent Alarm
- Flash
- Horn
- Hour Meter
- Integral Integrated Special Drive Axle For Construction Machinery
- 360° Continuous Turntable Rotation
- Positive Traction Four Wheel Drive
- Platform Load Sense System
- Fault Diagnosis System
- Operator Anti-crushing Protection System
- Harsh Environment Kits (includes Cylinder Sleeves, Boom Dust Kits, Ground And Platform Control Box Covers)
- 12V DC Auxiliary Power
- Battery 375Ah/48V *
- Driving Motor 9kW 4834rpm
- Lifting Motor 13kW 1855rpm

ZHEJIANG DINGLI MACHINERY CO., LTD.

No.188 Qihang Road,Deqing,Zhejiang P.R.China 313219

Telephone +86(572)8681688

E-Mail export@cndingli.com

<https://en.cndingli.com>

