



**Genie**  
A TEREX BRAND

# Elevated Performance

---

GENIE SCISSORS



TAKING YOU **HIGHER**

# Customers First Always

## Partnering for Success

Our dedication to lifting you higher extends well beyond the physical reach of our products. We thrive on building satisfying customer relationships because you, our customer, are at the center of everything we do.

Since 1966, we've been developing products to solve your worksite challenges — and that process never ends. Our team of product managers and engineers uses your input to design new products, featuring the latest technology to meet your changing needs. Then we manufacture those products to stringent standards that help increase quality, lower costs and give you exceptional value for years to come.

## Providing Superior Value

Our commitment doesn't end with the sale. Our dedicated service teams provide support when you need it most. Our extensive parts network ships most parts within 24 hours. Simply put, we're always working to help maximize your "up time" so you can be more successful.

Genie is driven by one goal: doing the right thing, at the right time for our customers. That's not just what we do; it's who we are. So tell us what you need. We're listening.



**Setting the Standard: Terex Aerial Work Platforms (AWP)** manufactures some of the most advanced, highest-valued lift equipment in the industry. Distinctive blue Genie® lifts set the standard for performance and durability — not to mention support from people who understand your business.



## Elevated Efficiency with Industry-Leading Design

The ever-expanding line of Genie® electric and rough terrain scissor lifts offers you high performance and versatility — boosting work site productivity. Genie electric scissor lifts are exceptionally mobile, letting you manoeuvre in tight worksites. Plus, they're productive and efficient, providing increased workspace for larger loads and more workers. Genie rough terrain scissor lifts also enhance productivity by providing exceptional traction, speed and gradeability. They're the perfect machines for big outdoor jobs where platform workspace is critical.

**Genie scissor lifts provide productivity-enhancing speed and gradeability to help you make the most of the equipment on your jobsite.**



# Maximize Your Productivity

Genie® self-propelled electric scissor lifts are the industry solution for increasing worksite productivity. Ideal for manoeuvring in tight spaces, they're excellent for indoor and outdoor construction, maintenance and installation applications with firm, level surfaces. Characterized by low noise levels, these lifts provide excellent capacity and generous platform workspace.



## Simple Access

These compact units easily pass through standard single or double doors. Solid non-marking tires are standard (except GS™-2669 DC, GS-3369 DC and GS-4069 DC models).



## Easy Service

On-board diagnostics help operators troubleshoot on the fly and make adjustments in the field to maximize uptime. Swing-out battery box and power module trays allow easy access to components for convenient service.

The Genie slab scissors family has been completely updated with features that enhance reliability, serviceability and performance.





### Quiet & Emission-Free

Electric scissorlifts are quiet and emission-free, an ideal tool for a number of indoor emission-sensitive applications such as warehouses, shopping malls, office buildings, hotels, schools and more. Gain access to even loftier jobs with the GS-4047, which provides working heights up to 13.70 m (44 ft 11 in) while fitting into spaces as narrow as 1.19 m (3 ft 11 in).



### Outdoor Functionality

Electric self-propelled scissors offer outdoor functionality on firm, level surfaces, providing accessibility for a wide variety of applications.

For outstanding outdoor performances on uneven terrain, choose the GS™-69 DC series: full height drive and powerful AC drive motors provide the GS-69 DC with unique rough terrain capabilities.



### Compact Manoeuvrability

All models have front-wheel drive and most models feature zero inside turning radius for excellent manoeuvrability in tight spaces like congested construction sites, elevators and narrow aisles.

## Electric Models Available

<a href="#">GS-1530</a>	<a href="#">GS-1532</a>	<a href="#">GS-1930</a>	<a href="#">GS-1932</a>	<a href="#">GS-2032</a>	<a href="#">GS-2632</a>	<a href="#">GS-3232</a>
<a href="#">GS-2046</a>	<a href="#">GS-2646</a>	<a href="#">GS-3246</a>	<a href="#">GS-4047</a>	<a href="#">GS-2669 DC</a>	<a href="#">GS-3369 DC</a>	<a href="#">GS-4069 DC</a>

# Standard & Optional Features

## Electric Self-Propelled Scissor Lifts

GS™-1530 & GS-1532

GS-1930 & GS-1932

GS-2032

GS-2632

GS-3232

GS-2046

GS-2646

GS-3246

GS-4047

GS-2669 DC

GS-3369 DC

GS-4069 DC

Platform													
FOLDING GUARDRAILS WITH PLATFORM HALF HEIGHT SWING GATE	S	S	S	S	S								
FOLDING GUARDRAILS WITH PLATFORM FULL HEIGHT SWING GATE							S	S	S	S	S	S	S
AIR LINE TO PLATFORM	0	0	0	0	0	0	0	0	0	0	0	0	0
Warning													
DESCENT ALARM	S	S	S	S	S	S	S	S	S	S	S	S	S
DUAL FLASHING BEACONS	0	0	0	0	0	0	0	0	0	0	0	0	0
MOTION ALARM	0	0	0	0	0	0	0	0	0	0	0	0	0
AUTOMOTIVE-STYLE HORN	0	0	0	0	0	0	0	0	0	0			
ELECTRONIC HORN	S	S	S	S	S	S	S	S	S	S	S	S	S
Stability													
CERTIFIED LOAD SENSOR	S	S	S	S	S	S	S	S	S	S	S	S	S
AUTOMATIC LEVELLING HYDRAULIC OUTRIGGERS						S					0	0	0
OSCILLATING AXLE											S	S	S
Power													
24 V DC, 225 AH BATTERIES	S	S	S	S	S	S	S	S	S				
24 V DC, 300 AH BATTERIES										S			
48 V DC, 225 AH BATTERIES											S	S	
48 V DC, 315 AH BATTERIES											0	0	S
Tyres													
SOLID NON-MARKING TYRES	S	S	S	S	S	S	S	S	S	S			
FOAM FILLED NON-MARKING RT TYRES											S	S	S

0 = Option      S = Standard



### Folding Guardrails

Neatly folding guardrails make it easy to manoeuvre through doorways, into elevators and throughout other height-restricted areas.





### Flexible Operation

Common across all GS models, the portable control box allows for use anywhere in and out of the platform.

Powered by Smart Link™ technology, the control box allows for accurate diagnosis, with user-friendly fault codes to allow on-site troubleshooting for maximized uptime.



### Power to Platform

This options offers availability of 110 V or 230 V power, allowing the use of electric tools directly from the platform for enhanced worksite productivity.



### Self-Levelling Outriggers

Automatic hydraulic, non-marking, self-levelling outriggers are available as an option on the Genie GS™-3232 and the GS-69 DC series, to level the lift on uneven ground before elevating the platform.

# Boost Your Performance and Power

Genie® rough terrain scissor lifts are tough, construction-oriented four-wheel drive machines with positive traction control — ideal for increasing productivity in demanding outdoor worksites. Competitive lift speed and large platforms maximize efficiency with the handling and capacity to get to the jobsite and finish working faster.



## Speed and Traction

Genie RT scissor lifts are able to traverse through uneven or rough terrain environments more efficiently. They are equipped with four-wheel drive and positive traction control for traction when you need it most. They offer up to 40% gradeability when driving on slopes.



## Full Drive Height

The Genie GS™-4069 RT is the world's first 12.12 m (39 ft 9 in) full drive height rough terrain scissor lift in its class. The GS-2669 and the GS-3369 RT models are also equipped with this feature, providing ultimate end user 'up time' while on the jobsite.



*The GS-69 RT models feature a 1.52 m (5 ft) extension deck when equipped with outriggers.*

Genie RT models are built for extra-rugged performance and built to last. They're designed to stand up to the rigors of frequent use in diverse worksite conditions.





### More Room to Work

These units are ideal for jobs that require greater capacity for more workers, materials and tools. For added workspace, all RT models come standard with a multi-position slide-out extension deck on the front of the platform. A rear slide-out extension deck and a super-deck package are also available for models from GS™-3384 and up. In addition, power to the platform allows workers to use electrically powered tools.



### Easy Service

On-board diagnostics help operators troubleshoot on the fly and make adjustments in the field to maintain uptime. Plus, slide- or pull-out engine trays allow easy access to components — no need to reach around obstacles inside the machine. Many parts and service procedures are common across the entire Genie® scissors line for cost-effective parts stocking and maintenance efficiencies.



## Rough Terrain Models Available

GS-2669 RT

GS-3369 RT

GS-4069 RT

GS-3384 RT

GS-3390 RT

GS-4390 RT

GS-5390 RT

# Standard & Optional Features

## Rough Terrain Self-Propelled Scissor Lifts

GS™-2669 RT  
GS-3369 RT  
GS-4069 RT  
GS-3384 RT  
GS-3390 RT  
GS-4390 RT  
GS-5390 RT

Platform							
DUAL SLIDE-OUT EXTENSION DECK PACKAGE (FRONT & REAR)				0	0	0	0
AIR LINE TO PLATFORM	0	0	0	0	0	0	0

Warning							
DESCENT ALARM	S	S	S	S	S	S	S
MOTION ALARM	0	0	0	0	0	0	0
DUAL FLASHING BEACONS	0	0	0	0	0	0	0
ELECTRONIC HORN	S	S	S	S	S	S	S

Stability							
AUTOMATIC LEVELLING HYDRAULIC OUTRIGGERS	0	0	0	0	0	0	S
OSCILLATING AXLE	S	S	S		S	0	0
CERTIFIED LOAD SENSOR	S	S	S	S	S	S	S

Power							
110 V, 120 V OR 240V/50 HZ GENERATOR	0	0	0	0	0	0	0

Engine							
HYDRAULIC OIL COOLER	0	0	0	S	S	S	S
DIESEL SCRUBBER/ SPARK ARRESTOR	0	0	0	0	0	0	0
ENGINE HEATER	0	0	0	0	0	0	0

Tanks							
SPARE PROPANE TANK	0	0	0	0	0	0	0

Tyres							
NON-MARKING FOAM FILLED RT TYRES	0	0	0	0	0	0	0
FOAM FILLED RT TYRES	S	S	S	S	S	S	S

0 = Option      S = Standard



### Oscillating axle

The front oscillating axle keeps all four wheels on the ground during operation, providing with more machine control and power when climbing jobsite obstacles.



### Generator

This hydraulically driven 110 V, 120 V or 240 V AC generator is available to supply power to the platform for operating tools.



### Self-levelling hydraulic outriggers

Save time with the automatic levelling hydraulic outriggers. All four outriggers automatically deploy simultaneously to ensure the lift is levelled on uneven ground before elevating the platform.


# Specifications

## Self-Propelled Scissor Lifts

MODEL	WORKING HEIGHT		WIDTH		TURNING RADIUS*		LIFT CAPACITY		GRADEABILITY**
	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	
<b>Electric Scissor Lifts</b>									
GS™-1530	6.40 m	20 ft 11 in	76 cm	2 ft 6 in	1.55 m	5 ft 1 in	272 kg	600 lbs	30%
GS-1532	6.40 m	20 ft 11 in	81 cm	2 ft 8 in	1.55 m	5 ft 1 in	272 kg	600 lbs	30%
GS-1930	7.60 m	24 ft 11 in	76 cm	2 ft 6 in	1.55 m	5 ft 1 in	227 kg	500 lbs	25%
GS-1932	7.60 m	24 ft 11 in	81 cm	2 ft 8 in	1.55 m	5 ft 1 in	227 kg	500 lbs	25%
GS-2032	7.90 m	25 ft 11 in	81 cm	2 ft 8 in	2.13 m	7 ft	363 kg	800 lbs	30%
GS-2632	9.80 m	32 ft 1 in	81 cm	2 ft 8 in	2.13 m	7 ft	227 kg	500 lbs	25%
GS-3232	11.50 m	37 ft 8 in	81 cm	2 ft 8 in	2.13 m	7 ft	227 kg	500 lbs	25%
GS-2046	7.90 m	25 ft 11 in	1.17 m	3 ft 10 in	2.29 m	7 ft 6 in	544 kg	1,200 lbs	30%
GS-2646	9.80 m	32 ft 1 in	1.17 m	3 ft 10 in	2.29 m	7 ft 6 in	454 kg	1,000 lbs	30%
GS-3246	11.50 m	37 ft 8 in	1.17 m	3 ft 10 in	2.29 m	7 ft 6 in	318 kg	700 lbs	25%
GS-4047	13.70 m	44 ft 11 in	1.15 m	91 in	2.3 m	7 ft 7 in	350 kg	770 lbs	25%
GS-2669 DC	9.70 m	31 ft 9 in	1.75 m	5 ft 9 in	4.6 m	15 ft 1 in	680 kg	1,500 lbs	35%
GS-3369 DC	11.75 m	38 ft 6 in	1.75 m	5 ft 9 in	4.6 m	15 ft 1 in	454 kg	1,000 lbs	35%
GS-4069 DC	14.12 m	46 ft 3 in	1.75 m	5 ft 9 in	4.6 m	15 ft 1 in	363 kg	800 lbs	35%
<b>Rough Terrain Scissor Lifts</b>									
GS-2669 RT	9.70 m	31 ft 9 in	1.75 m	5 ft 9 in	4.6 m	15 ft 1 in	680 kg	1,500 lbs	40%
GS-3369 RT	11.75 m	38 ft 6 in	1.75 m	5 ft 9 in	4.6 m	15 ft 1 in	454 kg	1,000 lbs	35%
GS-4069 RT	14.12 m	46 ft 3 in	1.75 m	5 ft 9 in	4.6 m	15 ft 1 in	363 kg	800 lbs	35%
GS-3384 RT	11.94 m	39 ft 2 in	2.13 m	7 ft	5.94 m	19 ft 6 in	1,134 kg	2,500 lbs	50%
GS-3390 RT	11.94 m	39 ft 2 in	2.29 m	7 ft 6 in	5.33 m	17 ft 6 in	1,134 kg	2,500 lbs	50%
GS-4390 RT	14.75 m	48 ft 4 in	2.29 m	7 ft 6 in	5.33 m	17 ft 6 in	680 kg	1,500 lbs	50%
GS-5390 RT	17.95 m	58 ft 10 in	2.29 m	7 ft 6 in	5.33 m	17 ft 6 in	680 kg	1,500 lbs	40%

\*Outside

\*\*Gradeability applies to driving on slopes, see operator's manual for details regarding slope ratings. Gradeability may vary depending on options installed on machine.

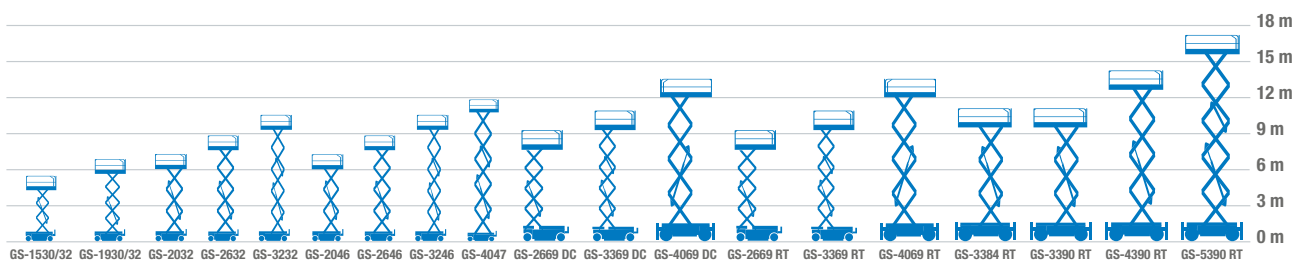





### Corporate Headquarters: United States

18340 NE 76th Street, P.O. Box 97030, Redmond, Washington 98073-9730

Telephone **+1 (425) 881-1800** · Fax +1 (425) 883-3475

[www.genielift.com](http://www.genielift.com)

### Europe, Middle East, Africa and Russia

To view all our locations visit [www.genielift.co.uk/locations](http://www.genielift.co.uk/locations)

Telephone **(+44) 800 988 3739** (Toll Free for UK/Ireland) · Fax +31 165 511 148 · Email: [AWP-InfoEurope@terex.com](mailto:AWP-InfoEurope@terex.com)

[www.genielift.co.uk](http://www.genielift.co.uk)

### Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico  
Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Effective Date: February, 2014. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie and Taking You Higher are trademarks of Terex Corporation or its subsidiaries.  
© 2014 Terex Aerial Work Platforms. Part No. 109305UK.

